



AS620

Single Zone Microwave Sensor - Inner zone protection only.

NOTE: This sensor will plug directly into the Toad modular range and into the Sigma S30, S32 & S34 security systems. With the Sigma S1 & S4 it is possible to hard wire this particular sensor with these systems.



AS625

Dual Zone Microwave Sensor - The inner zone provides a full alarm trigger and the exterior zone will provide a siren chirp.

NOTE: The inner and exterior zones sensitivities are adjustable. This sensor will plug directly into the Toad modular range and the Sigma S30, S32 and S34 security systems.



T2SS

Dual Stage Shock Sensor - A hard Impact provides a full alarm trigger and a soft impact provides a series of chirps.

NOTE: This sensor will plug directly into the Toad modular range and the Sigma S30, S32 & S34 security systems.



AS610

Single Stage Shock Sensor - A hard impact only will cause the sensor to trigger.

NOTE: This sensor will plug directly into the Toad modular range and the Sigma S30, S32 & S34 security systems.



T-TS1

Tilt Sensor - This sensor will detect any tilting of the vehicle to protect such accessories as the wheels, spare wheels etc.

NOTE: This sensor will plug directly into the Toad modular range and the Sigma S30, S32 & S34.



T103

Glass Break Sensor - The sensor works by detecting the frequency of the vehicles glass breaking.

NOTE: This sensor will plug directly into the Toad modular range and the Sigma S30, S32 & S34.



SR-105A

Two wire, two tone micro siren.



AR105ND

A self powered two tone siren, which is a battery back-up version of the SR-105A siren. This siren also has a key switch on the rear of the siren.



6-TONE-S

A two wire, six tone siren.



VTD-5-PIN-PREWIRE

A two wire, two tone micro siren with the addition of a five pin relay and wiring loom, enabling you to quickly hard wire a secondary siren onto an existing security system.



TEXT ALERT

A self contained security device sends a text message to your mobile telephone anywhere in Europe alerting you that your vehicle has been tampered with, or that the vehicles battery voltage is falling, with two-way communication enabling you to control the Text Alert from your mobile phone. The unit has a low current draw and the Text Alert automatically arms when the ignition is switched off.



2012054

An RF operated pager that provides a personal alert to the pager when the alarm system is triggered. The pager has two negative and one positive trigger inputs and has an operational range of up to 500m.



VTD-CYCLELOOP-K

A wired coiled closed loop detector for the protection of accessories such as cycles, radios, spotlights etc and will trigger the security system when the loop is cut, broken or removed.




PWC402

A universal window closure module that can close 2 or 4 positive switched windows, 2 or 4 negative switched windows or 2 positive and negatively switched windows. This module can also support total opening on certain vehicles and can operate via a positive or negative switched input.



IRS

A wireless passive infra-red sensor (IRS) which requires programming to the universal radio frequency interface (URFI).

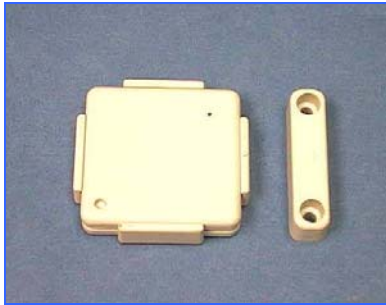

MPST

A wireless magnetic door contact which requires programming to the universal radio frequency interface (URFI).



URFI

A universal radio frequency interface which allows up to a combination of six individual sensors to be programmed in at any one time.



639

A short metal adjustable pin switch which is 35mm in length. It is supplied with a mounting plate, a locking plate and 2 screws.



TS45470

A plastic pin switch which is 58mm in length. This length of this switch is non-adjustable and is a flush mount fit.



SIGAC14

A plastic adjustable pin switch which is 54mm in length. The length of the switch can be cut to one of five different heights and is a flush mount fit.




SIGAC14T

A telescopic plastic pin switch which is 70mm in length. This switch stands 20mm proud above the flush mount plate and a telescopic plunger which rises above this plate.



OSP/SWREN

A prewired bonnet pin switch which has a plastic snap lock bonnet with 2 wires.

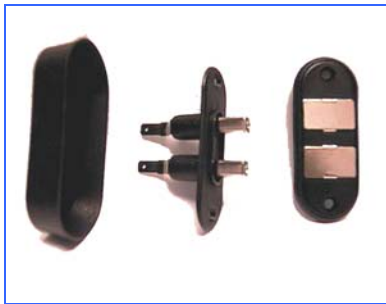

VTD-SLDCONT

This pin switch which has a pair of contacts has been designed for vehicles with sliding or tailgate doors.